
Lecture 11

Internal Combustion Engines

Dr. Abdul Aziz Shuvo

Assistant Professor
Department of Mechanical Engineering,
BUET, Dhaka-1000


INTRODUCTION OF HEAT ENGINES

- ❖ **Heat Engines**: A machine or device which derives heat from the combustion of fuel and converts part of this energy into mechanical work is called a **heat engine**.
- ❖ Heat engines may be classified into two main classes as follows:
 1. Internal combustion engines (e.g. Automobile engines)
 2. External combustion engines (e.g. Steam engines)


INTRODUCTION OF I.C. ENGINES

- ❖ **Internal Combustion Engines** : An internal combustion engine (ICE) is a heat engine where the combustion of a fuel occurs with an oxidizer (usually air) in a confined space named combustion chamber.
- This exothermic reaction creates gases at a very high temperature and pressure, which are permitted to expand inside that confined chamber.
 - The high pressure gas **expands** against the mechanical mechanisms (linkage) of the engine.
 - Thrust produced by this expanding gas drives the engine creating useful work.

INTRODUCTION OF I.C. ENGINES

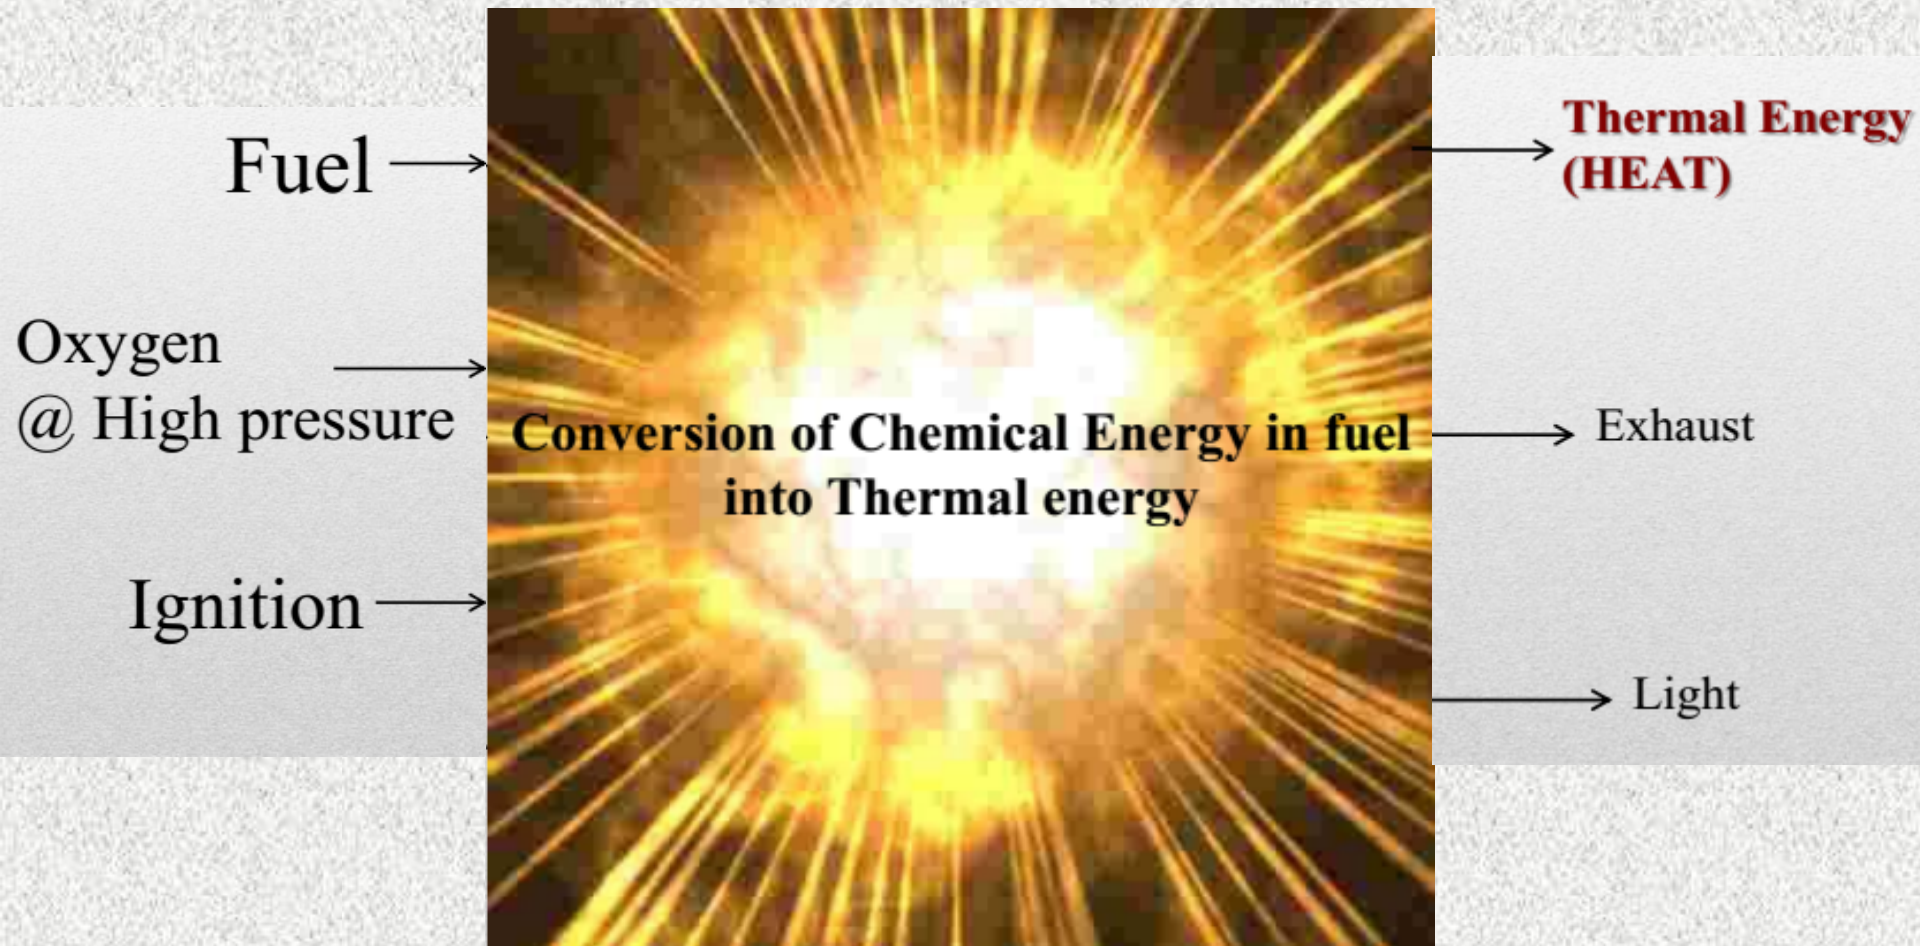

MECHANISM OF I.C. ENGINES

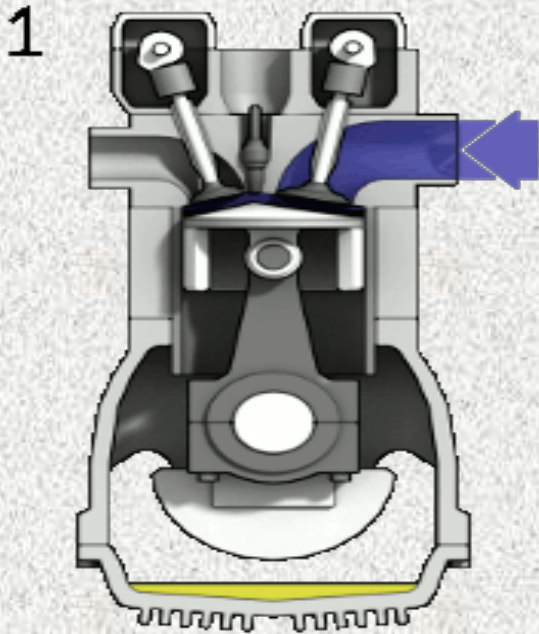

- All Internal combustion engines must carry out five events:
 - Air-fuel mixture must be **brought** into the combustion chamber.
 - Mixture must be **compressed**.
 - Mixture must be **ignited**.
 - Burning mixture must expand into increasing combustion chamber volume.
 - Exhaust gases must be removed.

Mechanism of Internal Combustion Engine

APPLICATION OF I.C. ENGINES



Automotive appliances

APPLICATION OF I.C. ENGINES



In War...

APPLICATION OF I.C. ENGINES





Ships and Aviation

CLASSIFICATION OF I.C. ENGINES

The internal combustion engines may be classified in the following ways:


1. According to the *type of fuel* used
 - a) Petrol engines, b) Diesel engines, and c) Gas engines.
2. According to the *method of igniting* the fuel
 - a) Spark ignition engines, and b) Compression ignition engines.
3. According to the *number of strokes* per cycle
 - a) Four stroke cycle engines, and b) Two stroke cycle engines.
4. According to the *cycle of operation*
 - a) Otto cycle engines, b) Diesel cycle engines, and c) Dual cycle engines.

ENGINE ANATOMY

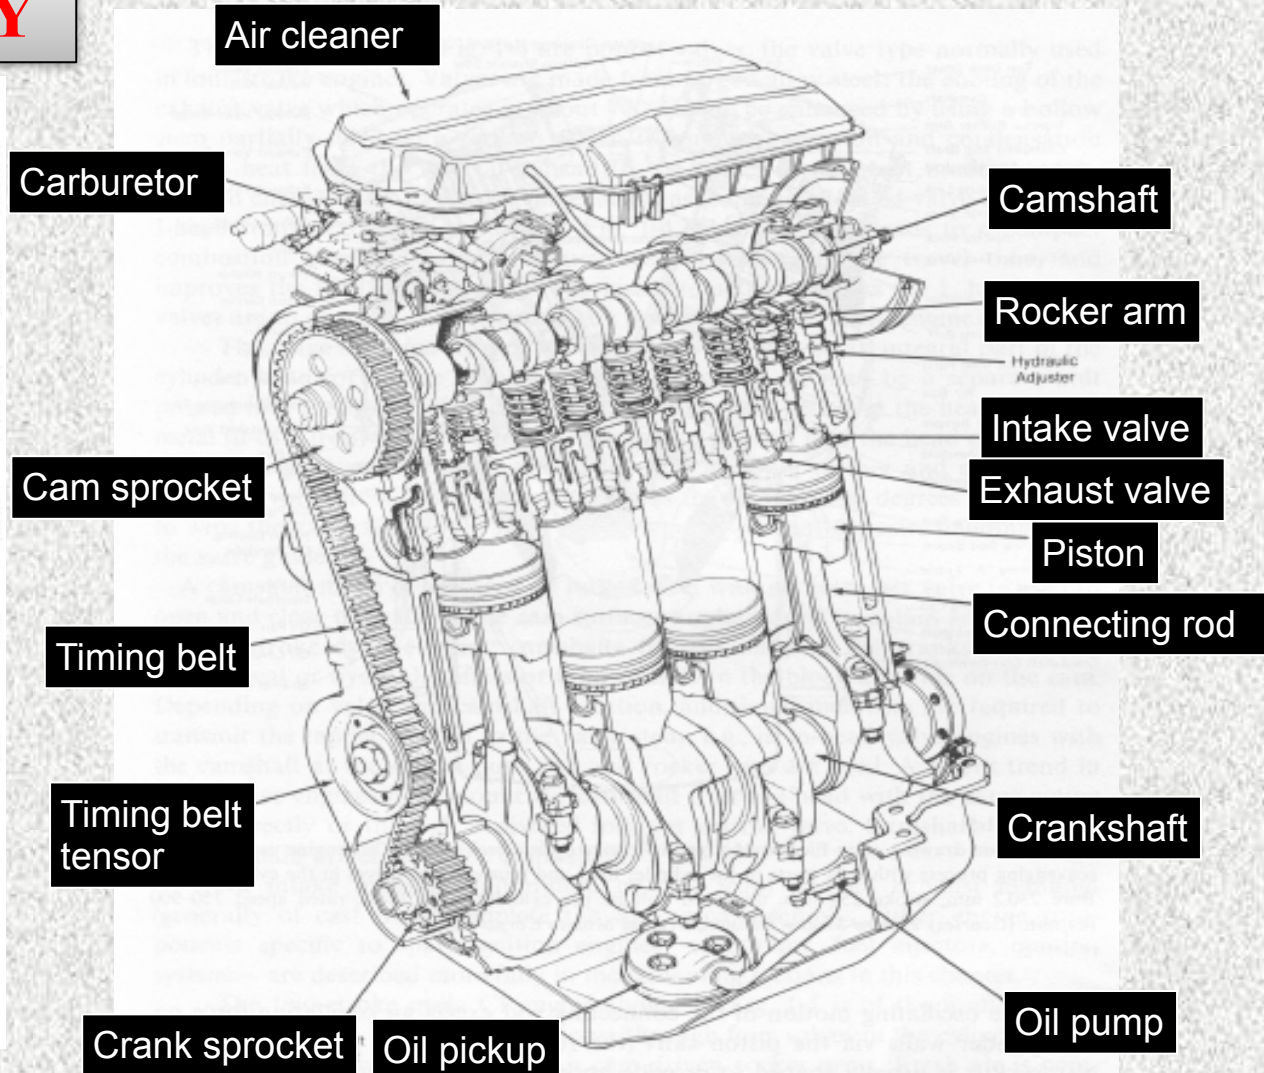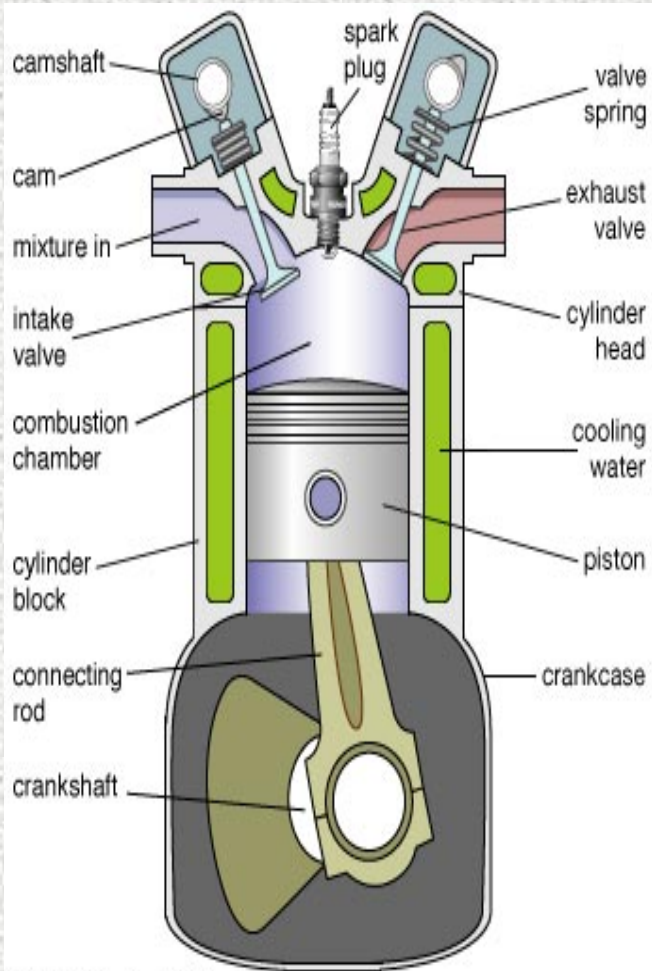


CONSTRUCTIONAL DETAILS OF I.C. ENGINE


PISTON

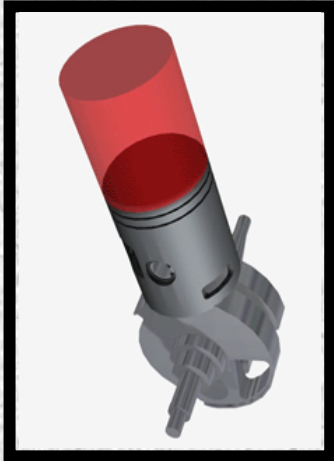

CYLINDER BLOCK

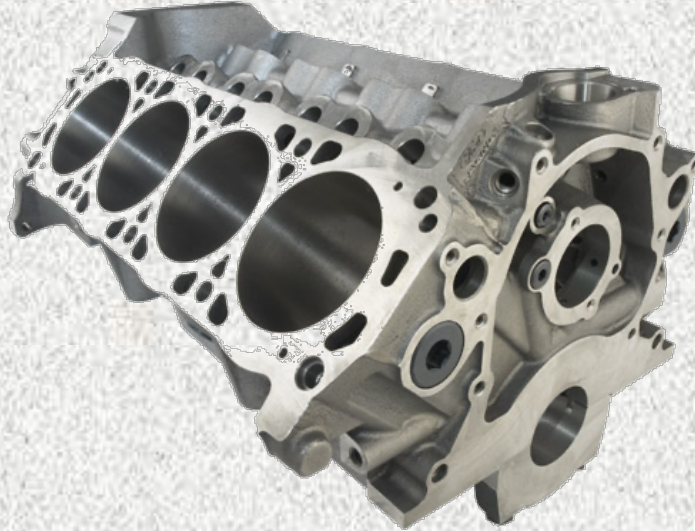

CRANK and CRANKSHAFT

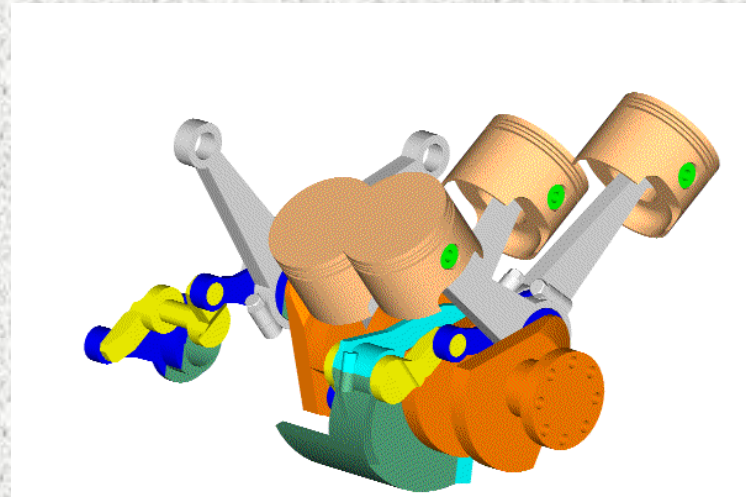


SPARK PLUG



CAM and CAMSHAFT



VALVE

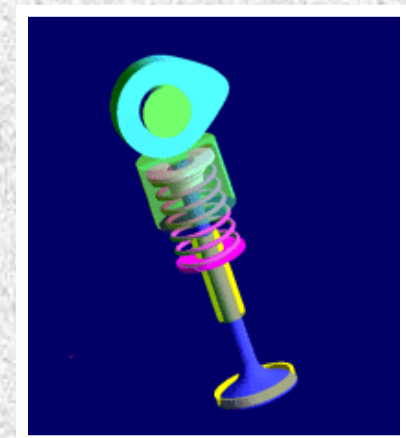


CONSTRUCTIONAL DETAILS OF I.C. ENGINE

- ❖ **Cylinder** : It is one of the most important part of the engine, in which the piston moves to and fro in order to develop power. The engine cylinder has to withstand a high pressure.
- ❖ **Cylinder head** : It is fitted on one end of the cylinder, and act as a cover to close the cylinder bore. Generally, the cylinder head contains inlet and exit valves for admitting fresh charge and exhausting the burnt gases.
- ❖ **Piston** : It is considered as the heart of an I.C. engine, whose main function is to transmit the force exerted by the burning of charge to the connecting rod.
- ❖ **Crankshaft** : It is considered as the backbone of an I.C. engine whose function is to convert the reciprocating motion of the piston into the rotary motion with the help of connecting rod.


CONSTRUCTIONAL DETAILS OF I.C. ENGINE

- ❖ **Connecting rod** : It is a link between the piston and crankshaft, whose main function is to transmit force from the piston to the crankshaft.
- ❖ **Cam and Camshaft** : Camshaft opens the intake and exhaust valves at correct time and for correct duration. Cam changes rotary motion into reciprocating motion.
- ❖ **Intake valve** : Intake valve lets the air or air-fuel mixture to enter the combustion chamber.
- ❖ **Exhaust valve** : Exhaust gases lets the exhaust gases escape the combustion chamber.
- ❖ **Spark Plug** : It initiates the ignition after the compression stroke.


CYLINDER ARRANGEMENT

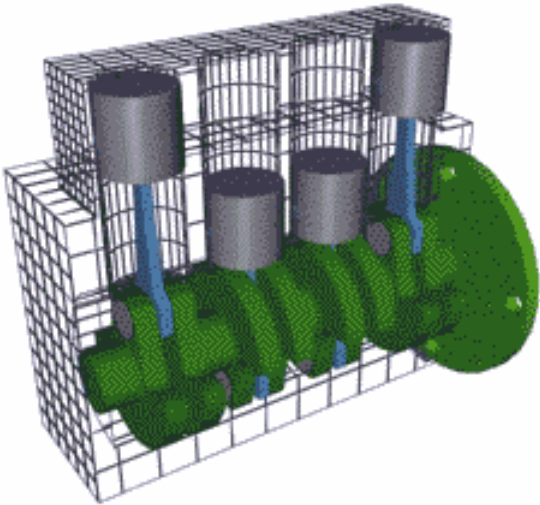

In line cylinder

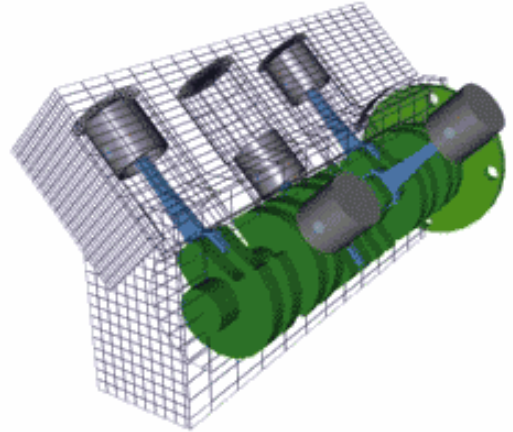


V cylinder

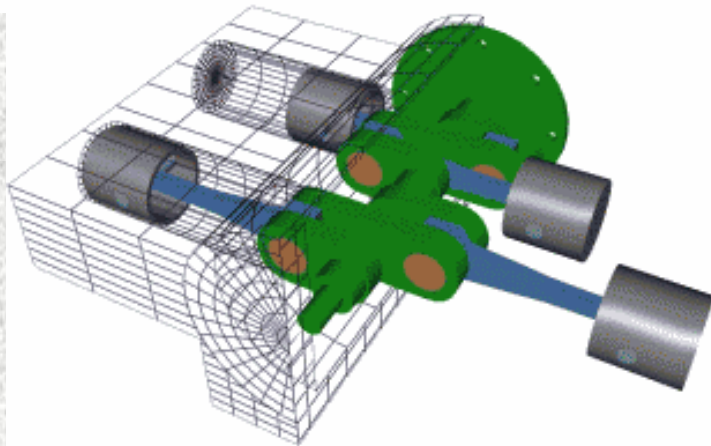

Flat or opposed cylinder

CYLINDER ARRANGEMENT

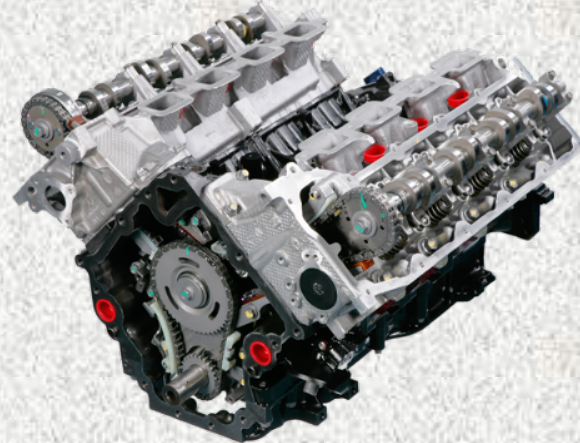

S.I. AND C.I. ENGINES

- **Spark Ignition engines (S.I. engines) :** Air and fuel mixture is compressed in the compression chamber and the combustion is initiated by spark.
- **Compression Ignition engines (C.I. engines) :** Air alone is compressed in the engine and fuel is injected into the cylinder towards the end of the combustion stroke. Combustion starts when the air-fuel mixture self ignites due to high temperature in the combustion chamber caused by high compression.
- ✓ **Both S.I. and C.I. engine operate on either a four stroke (4-stroke) cycle or a two stroke (2-stroke) cycle.**

4-STROKE ENGINE OPERATION


STEPS INVOLVED:

1-SUCTION

2-COMPRESSION

3-EXPANSION

4-EXHAUST

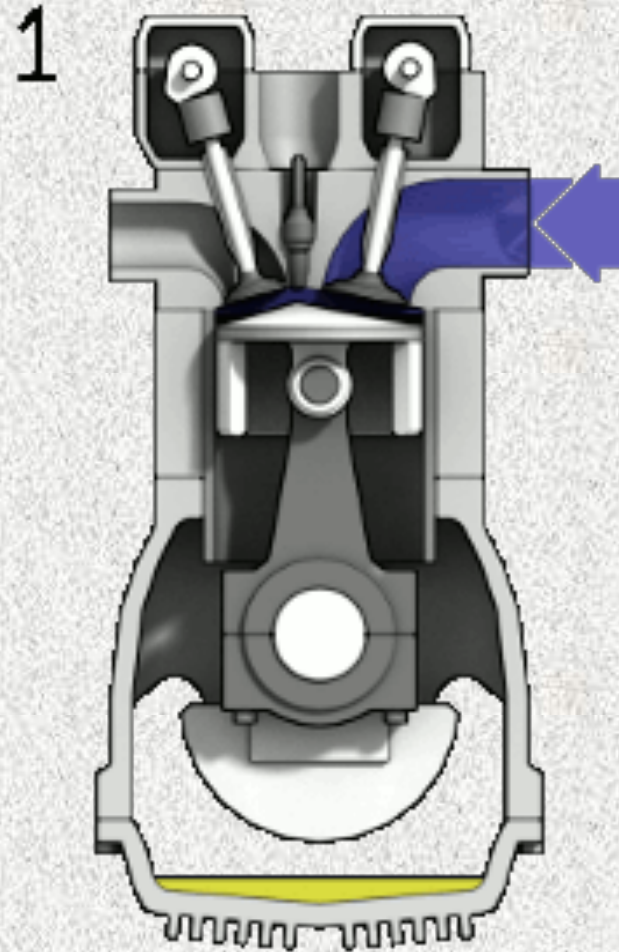

4-STROKE ENGINE OPERATION

- **Intake Stroke**

- Intake valve open.
- Piston moves down (TDC to BDC) in cylinder.
- Low pressure is created in cylinder.
- Air is brought into the combustion chamber due to pressure differences.

- **Compression Stroke**

- Both valves closed.
- Piston moves from BDC to TDC
- Air in combustion chamber is compressed, raising its temperature.
- Near TDC of Compression stroke, fuel is injected into the combustion chamber

4-STROKE ENGINE OPERATION


- **Power Stroke**

- Both valves are closed
- Air-fuel mixture burns rapidly
- Expansion of the burning air-fuel mix applies force to the head of the piston
- Piston is driven down in the cylinder.

- **Exhaust Stroke**

- Piston moves from BDC to TDC.
- Exhaust valve is open.
- Burnt air-fuel mixture is scavenged from combustion chamber.

ENGINE TERMINOLOGY

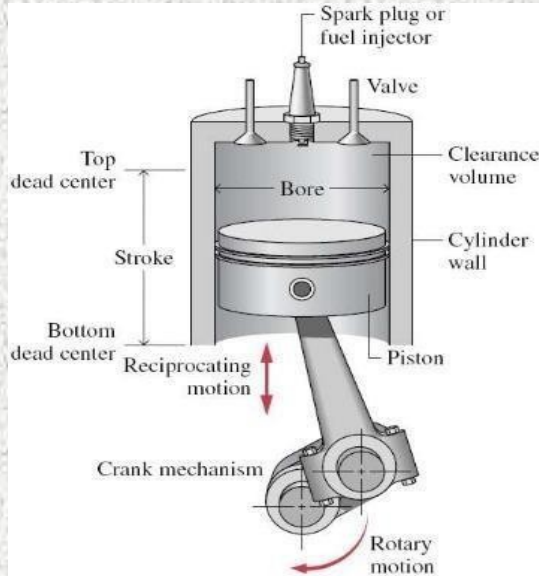


Bore: Diameter of Cylinder.

Top Dead Center (TDC): Position of Piston where Cylinder Volume is minimum.

Bottom Dead Center (BDC): Position of Piston where Cylinder Volume is maximum.

Stroke: It is the maximum distance that the piston moves in one direction. It is the distance between TDC to BDC.

ENGINE TERMINOLOGY

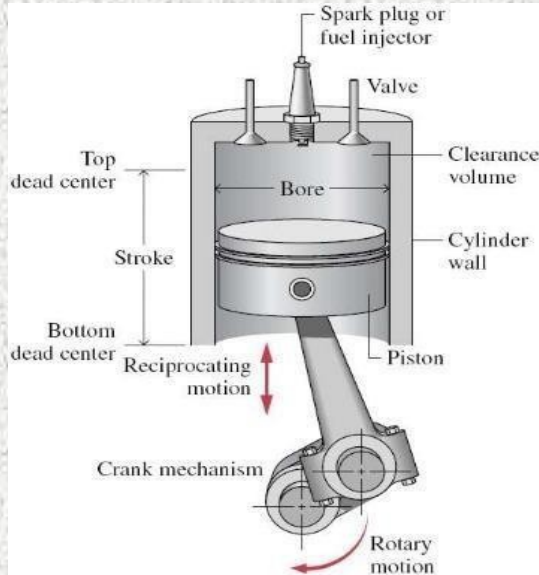

Clearance Volume (V_c): Minimum Cylinder volume when Piston is at TDC.

Swept or Displacement Volume (V_s or V_d): Volume swept out by the piston as from TDC to BDC.

$$V_s = \frac{\pi}{4} d^2 \times l$$

Where d is the cylinder bore and l the stroke

Compression Ratio (r_v): Ratio of maximum volume at BDC and minimum volume at TDC.

$$r = \frac{V}{V_c} = \frac{V_c + V_s}{V_c}$$

Mean piston speed: the distance traveled by the piston per unit of time.

$$V_m = \frac{2lN}{60} \text{ m/s}$$

What is meant by cc in Engine?

- The size of an engine is measured in cubic centimetres (cc) and refers to the displacement volume of the engine.

Problem: A four-cylinder car engine has bore x stroke = 79 mm x 77 mm.
What is the capacity of the engine in cc?

$$V_s = \frac{\pi}{4} d^2 \times l$$

Solution: Capacity in cc = $N \cdot (\pi/4) \cdot B^2 \cdot S$

Here, N= number of cylinders

B= bore diameter in cm


S= stroke length in cm

Therefore, Engine Capacity in cc

$$= 4 \times (\pi/4) \times (7.9)^2 \times (7.7) = 1509 \approx \mathbf{1500 \text{ cc Ans.}}$$

2-STROKE ENGINE OPERATION

- ❖ Suction and compression during upward stroke of the piston
- ❖ Expansion and exhaust during downward stroke of the piston
- ❖ There is one power stroke for every revolution of the crankshaft.

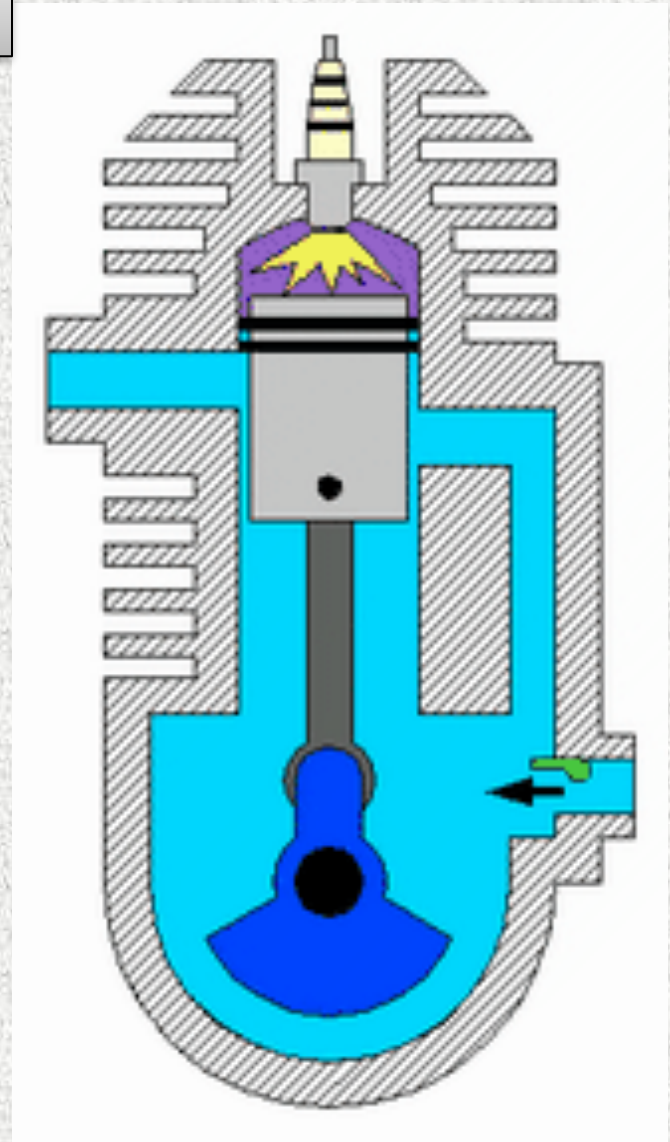

A six-cylinder two-stroke engine with a compression ratio $r = 9$ produces a torque of 1100 Nm at a speed of 2100 rpm. It has a bore b of 123 mm and a stroke s of 127 mm.

a) What is the displacement volume and the clearance volume of a cylinder?

b) mean piston speed

Solution:

$$V_d = (\pi/4) * b^2 * L = 1.51 \times 10^{-3} \text{ m}^3$$

We know that $r = (V_d + V_c) / V_c$

The clearance volume, $V_c = V_d / (r - 1) = 1.89 \times 10^{-4} \text{ m}^3$

$$V_m = 2NL/60$$

$$= 2 * (2100/60) * 0.127 = 8.89 \text{ m/s}$$

COMPARISON OF 4-STROKE AND 2-STROKE ENGINE

Advantages :

- 1.** A two stroke cycle engine gives twice the number of power strokes than the four stroke cycle engine at the same engine speed.
- 2.** For the same power developed, a two-stroke cycle engine is lighter, less bulky and occupies less floor area.
- 3.** As the number of working strokes in a two-stroke cycle engine are twice than the four-stroke cycle engine, so the turning moment of a two-stroke cycle engine is more uniform. Thus it makes a two-stroke cycle engine to have a lighter flywheel and foundations. This also leads to a higher mechanical efficiency of a two-stroke cycle engine.


COMPARISON OF 4-STROKE AND 2-STROKE ENGINE

Disadvantages

1. Thermal efficiency of a two-stroke cycle engine is less than that a four-stroke cycle engine.
2. Overall efficiency of a two-stroke cycle engine is also less than that of a four-stroke cycle engine because in a two-stroke cycle, inlet and exhaust ports remain open simultaneously for sometime. A small quantity of charge is lost from the engine cylinder.
3. In case of a two-stroke cycle engine, the number of power strokes are twice as those of a four-stroke cycle engine. Thus the capacity of the cooling system must be higher. There is a greater wear and tear in a two-stroke cycle engine.
4. The consumption of lubricating oil is large in a two-stroke cycle engine because of high operating temperature.

S.I. ENGINE (PETROL ENGINE) OPERATION

**Stroke 1
(intake)** Air
fuel mixture
enters cylinder.

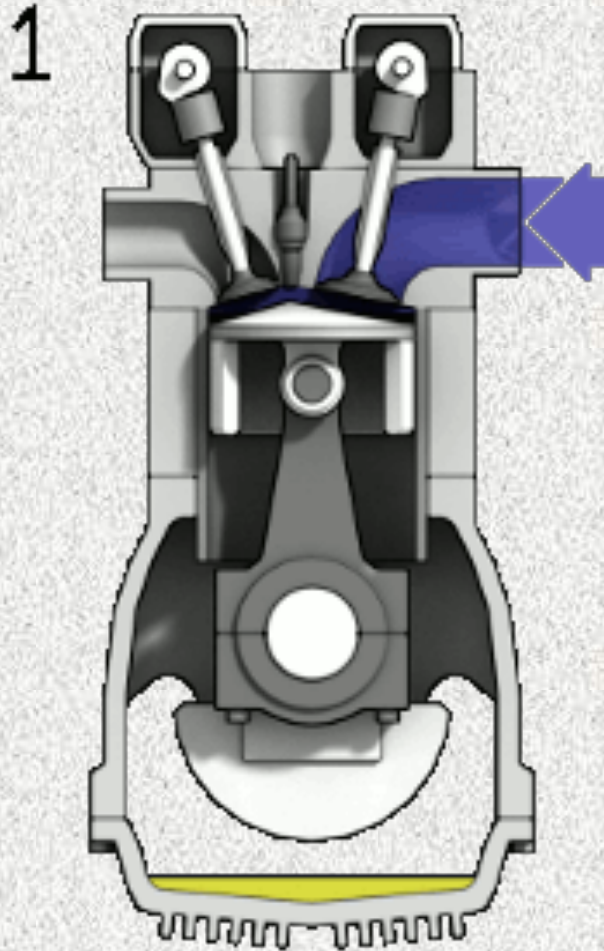

Stroke 3 (power)
Combustion is
initiated by spark


**Stroke 2
(compression)** Air fuel
mixture is then
compressed

**Stroke 4
(exhaust)** burnt
gases are expelled
from the engine.

C.I. ENGINE (DIESEL ENGINE) OPERATION

**Stroke 1
(intake)** only
air enters
cylinder.

**Stroke 2
(compression)** air is
compressed to high
extent, raising its
temperature.

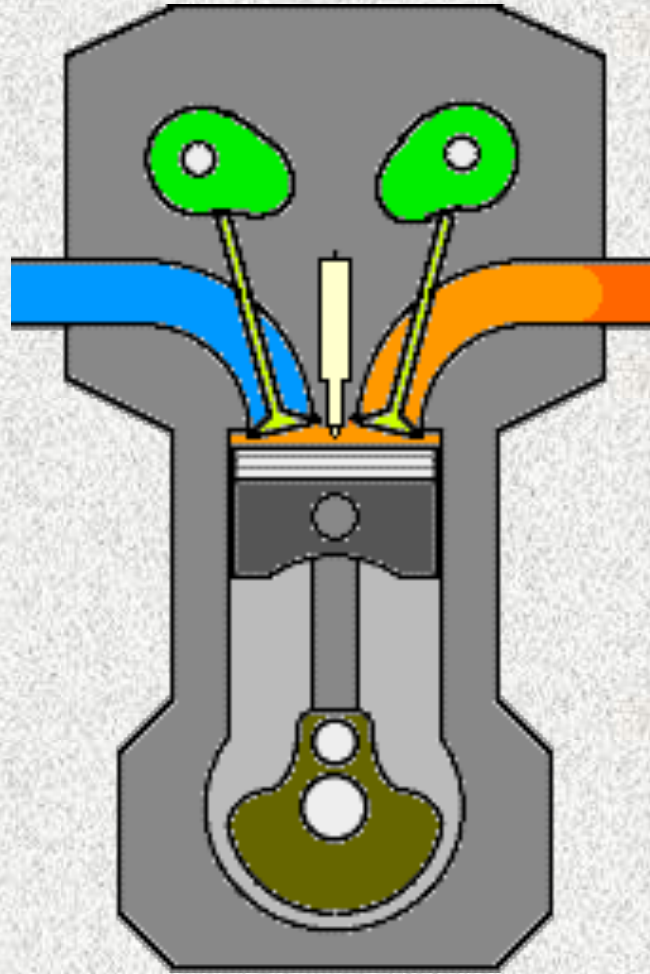


Stroke 3 (power)
diesel is injected,
high air temperature
ignites diesel.


**Stroke 4
(exhaust)** burnt
gases are expelled
from the engine.

METHOD OF FUEL INJECTION


Carburetor

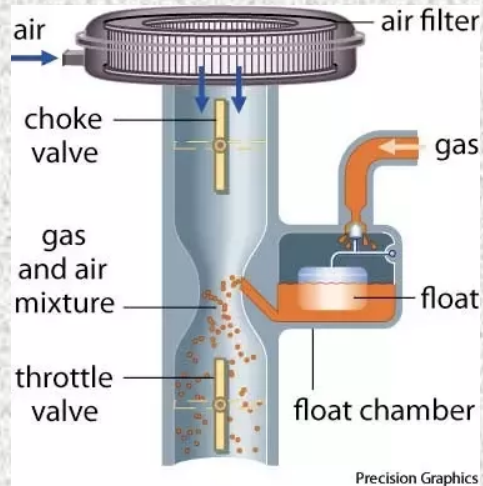

Throttle body Fuel Injection

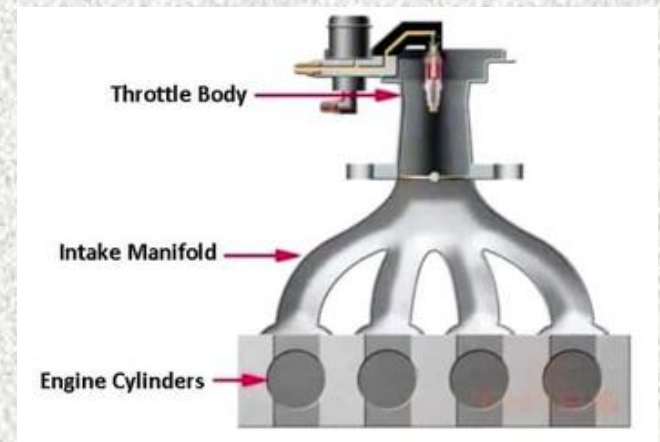

Multi port Fuel Injection

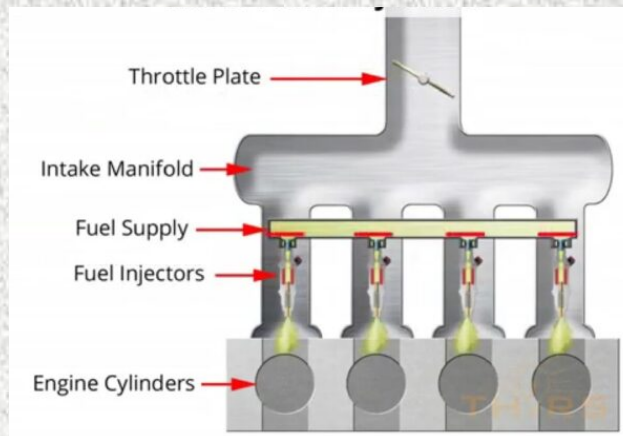

COMPARISON OF PETROL AND DIESEL ENGINES

Petrol Engines

1. A petrol engine draws a **mixture** of petrol and air during suction stroke.
2. The **carburettor** is employed to mix air and petrol in the required proportion and to supply it to the engine during suction stroke.
3. **Pressure** at the end of compression is about 10 bar.
4. The charge (i.e. petrol and air mixture) is ignited with the help of **spark plug**.

Diesel Engines

A diesel engine draws only air during suction stroke.

The **injector or atomiser** is employed to inject the fuel at the end of combustion stroke.

Pressure at the end of compression is about 35 bar.

The fuel is injected in the form of fine spray. The temperature of the compressed air is sufficiently high to ignite the fuel.

COMPARISON OF PETROL AND DIESEL ENGINES

Petrol Engines

5. The combustion of the fuel takes place at **constant volume**. It works on Otto cycle.
6. A petrol engine has **compression ratio** from 6 to 10.
7. The **starting is easy** due to low compression ratio.
8. As the compression ratio is low, the **petrol engines are lighter and cheaper**.
9. The running cost of a petrol engine is high because of the **higher cost of petrol**.

Diesel Engines

The combustion of the fuel takes place at **constant pressure**. It works on Diesel cycle.

A diesel engine has compression ratio from 15 to 25.

The starting is difficult due to high compression ratio.

As the compression ratio is high, the diesel engines are heavier and costlier.

The running cost of diesel engine is low because of the lower cost of diesel.

COMPARISON OF PETROL AND DIESEL ENGINES

Petrol Engines

10. The **maintenance cost** is less.
11. The **thermal efficiency** is about 26%.
12. **Overheating** trouble is more due to **low thermal efficiency**.
13. These are **high speed** engines.
14. The petrol engines are generally employed in **light duty** vehicle such as scooters, motorcycles and cars. These are also used in aeroplanes.


Diesel Engines

The maintenance cost is more.
The thermal efficiency is about 40%.
Overheating trouble is less due to high thermal efficiency.
These are relatively low speed engines.

The diesel engines are generally employed in heavy duty vehicles like buses, trucks, and earth moving machines.


OTHER TYPE OF I.C. ENGINES

Wankel Engine (Rotary Engine)

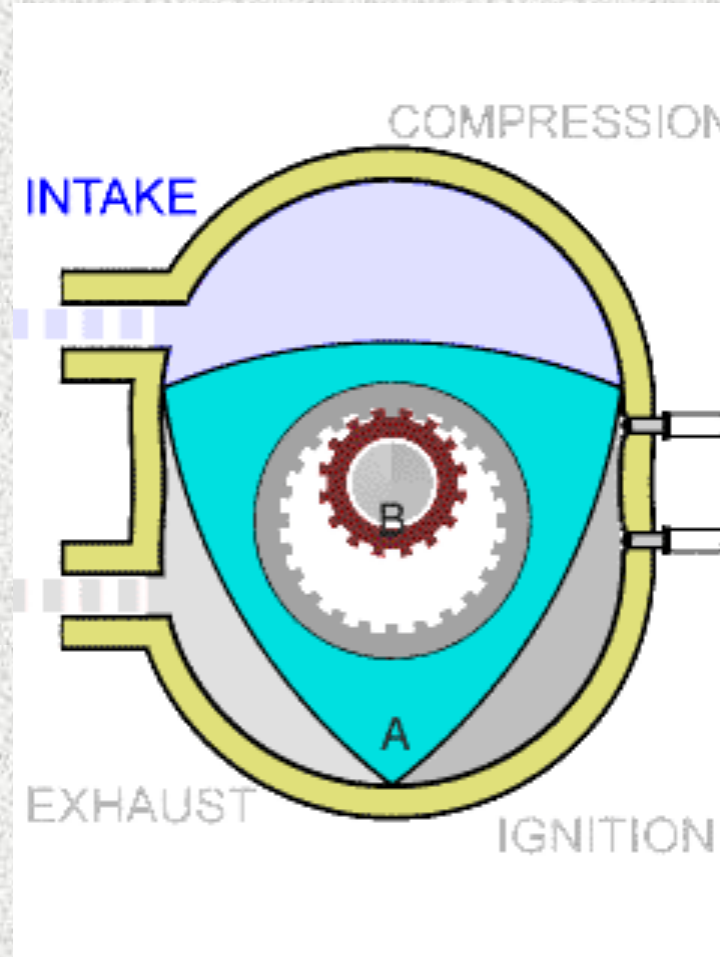

OTHER TYPE OF I.C. ENGINES

Radial Piston Engine

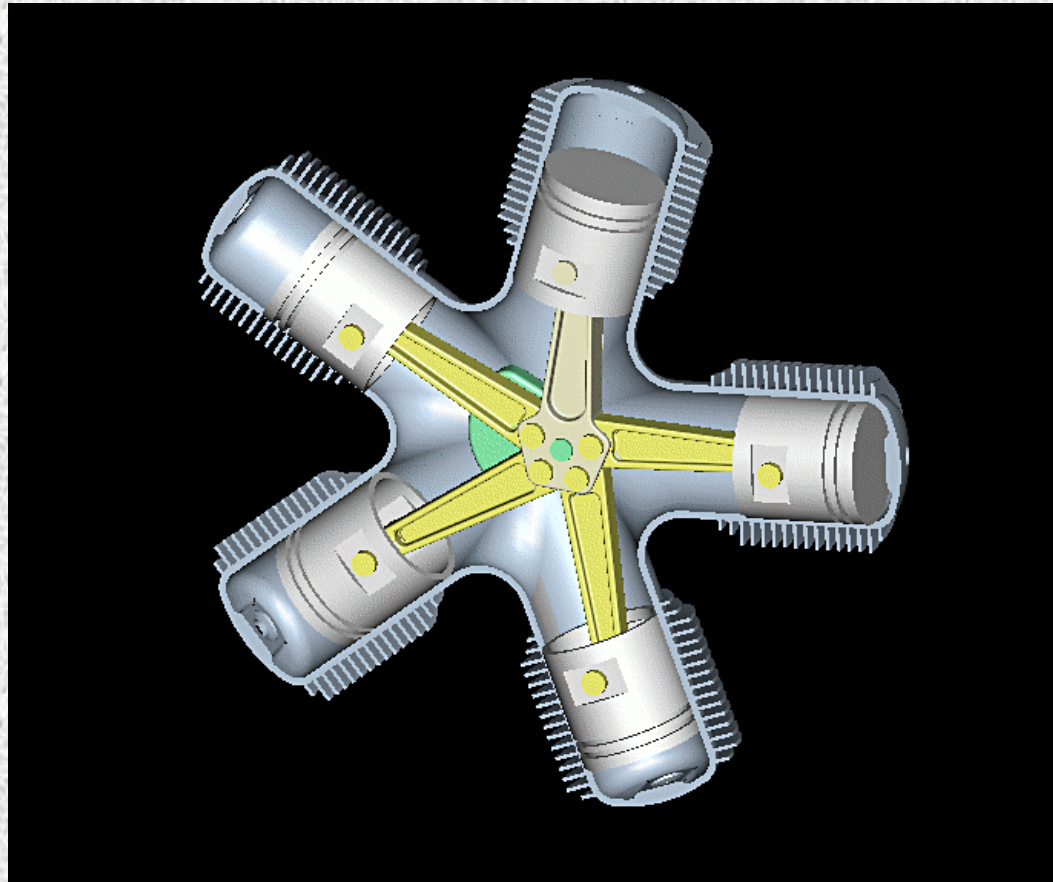

Thank You